


BT高精度液压刀柄

BT HIGH PRECISION HYDRAULIC CHUCK




BT高精度液压刀柄

A011628-A011644

订单号 Order NO.

BT HIGH PRECISION HYDRAULIC CHUCK
(JIS B 6339)

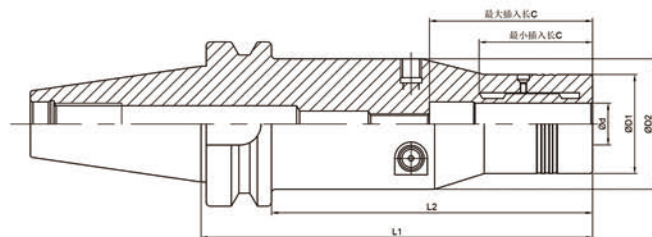

	Order NO.	Type	Φd	ΦD1	ΦD	L1	L2	Insection Length C1	Insection Length C	Price
●	A011628	BT40-PHC06-150	6	28	42	150	123	29	48.5	
●	A011629	BT40-PHC08-150	8	30	44	150	123	35	48	
●	A011630	BT40-PHC10-150	10	32	46	150	123	38	54.5	
●	A011631	BT40-PHC12-150	12	34	48	150	123	38	54.5	
●	A011632	BT40-PHC14-150	14	36	50	150	123	38	54.5	
●	A011633	BT40-PHC16-150	16	38	50	150	123	43	62.5	
●	A011634	BT40-PHC18-150	18	42	50	150	123	46	66	
●	A011625	BT40-PHC20-150	20	43	50	150	123	40	53.5	
●	A011635	BT40-PHC25-150	25	53	63	150	123	52	77.5	
●	A011636	BT40-PHC32-150	32	62	72	150	123	58	87.5	
●	A011637	BT50-PHC06-150	6	28	42	150	123	29	48.5	
●	A011638	BT50-PHC08-150	8	30	44	150	123	35	48	
●	A011639	BT50-PHC12-150	12	34	48	150	123	38	54.5	
●	A011640	BT50-PHC14-150	14	36	50	150	123	38	54.5	
●	A011641	BT50-PHC16-150	16	38	50	150	123	43	62.5	
●	A011642	BT50-PHC18-150	18	42	50	150	123	46	66	
●	A011643	BT50-PHC20-150	20	43	50	150	123	40	53.5	
●	A011644	BT50-PHC32-150	32	62	75	150	123	58	90	

注意 Caution

- 请使用柄径公差在h6以内的刀具
- 请勿使用柄部有平面或缺口等的刀具
- 禁止空锁
- 刀具插入长度不能小于最小刀具加长C
- Use only cutting tools that have a shank tolerance within h6.
- Do not use with cutting tools made with a flat on the shank (ie:Weldon type shank)
- Do not clamp without a tool.
- Always insert the cutting tool into the holder beyond min. clamping length C.

- 可供现货/ in stock
- 交货期短/ within a few days
- ▲ 可定制/ on request